

Type J combination lock

USER INSTRUCTIONS




For further information please contact your probe distributor

PR *O* **BE** .uk.com

storage solutions worth looking into..


STEP 1

Your Combination Lock is set at the factory to open at “-0-0-0” To set the new code, you need to turn dials to the correct code firstly.

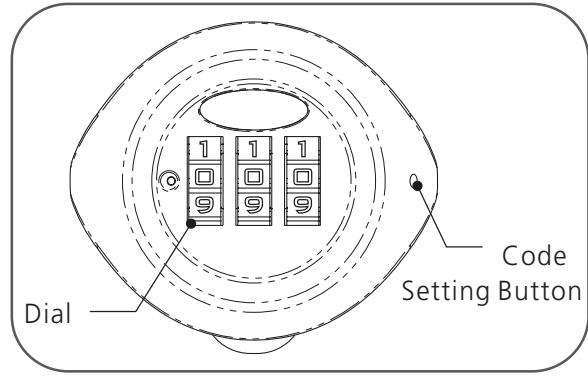


STEP 2

press and hold the code setting button

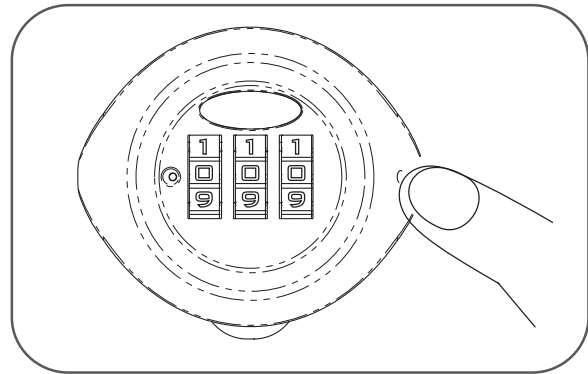


STEP 3

Set dials to the desired combination and release the button.

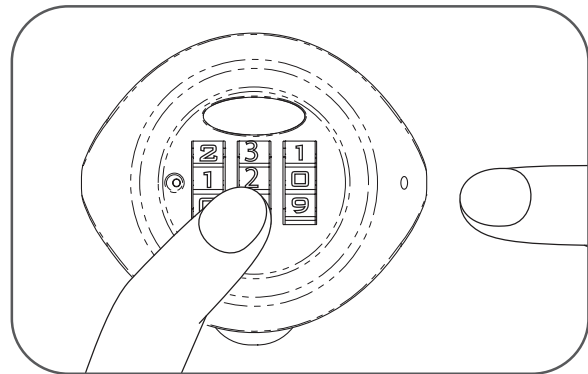

STEP 4

Scramble the new code to lock the door.

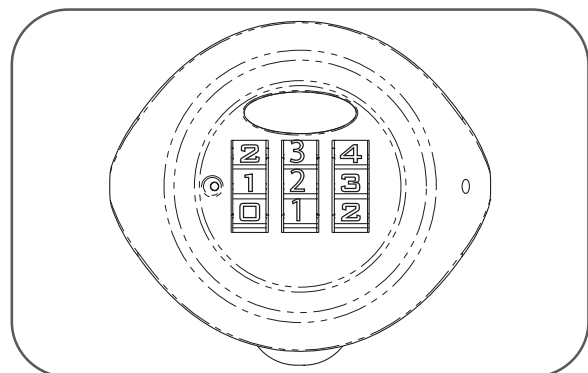


For further information please contact your probe distributor

PR O BE.uk.com

storage solutions worth looking into..

PROCEDURE TO OPEN LOCK IN CASE OF **CODE LOSS**

- Step 1 Insert decoder into gap between dial and lock casing as per the illustration below
- Step 2 Hold decoder lightly and turn the dials through the number sequence
- Step 3 When you reach the correct number the decoder will 'sink' into the gap
- Step 4 Repeat the above steps for each dial until you have found all 3 numbers

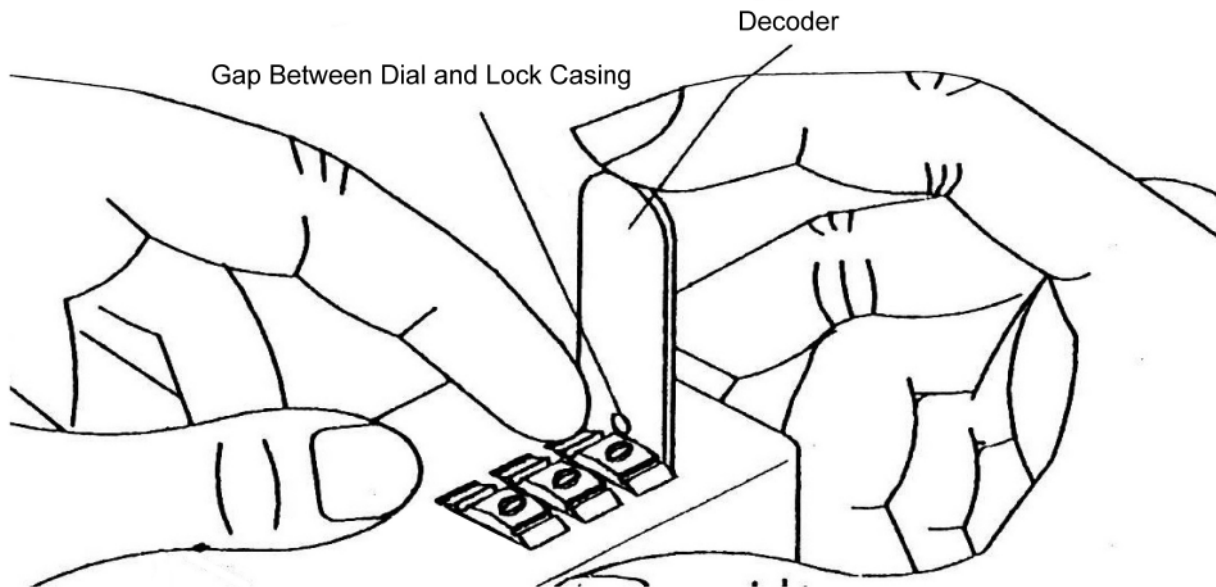

For further information please contact your probe distributor

PR *O* **BE** .uk.com

storage solutions worth looking into..