



11 SEED POD

- Step 1 Position base where the rotating pod is required.
HEAVY ITEM (care should be taken when lifting)
- Step 2 Level base using adjustable feet and spirit level
- Step 3 Fix 5 bearing plates to underside of 5 base plate lockers (large wheel facing downwards towards base)
- Step 4 Take 5 locker seeds with the large bearing plates and attach them to the centre hub of the rotating base unit using M6 nut and bolt set
- Step 5 Position the remaining Locker seeds to fill the correct gaps (see main drawing) using the front holes in the side of the seeds bolt together to complete the pod Circle
- Step 6 Fix standard infill Centre black Cap using tape provided



PLAN VIEW 11 Seed Unit

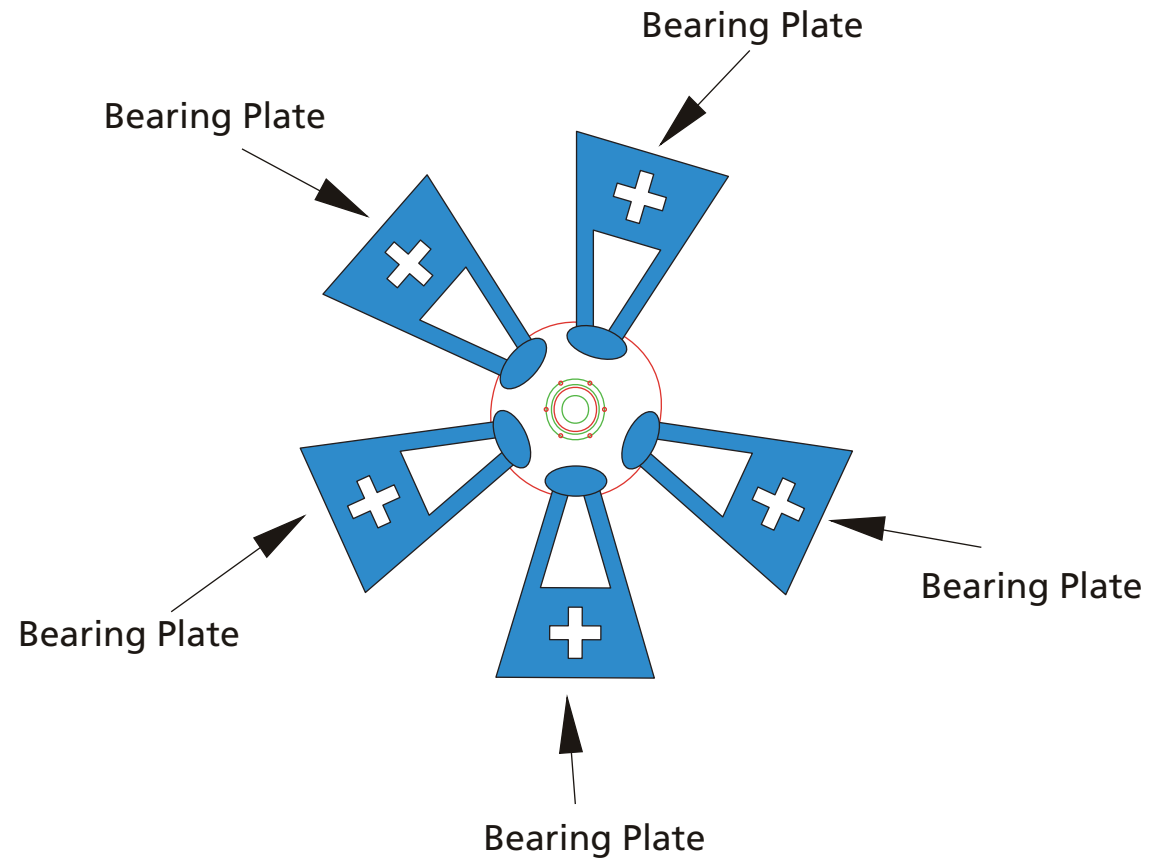

Plan View of turntable showing position of Seed Plates