



7 SEED POD

- Step 1 Position base where the rotating pod is required.
HEAVY ITEM (care should be taken when lifting)
- Step 2 Level base using adjustable feet and spirit level
- Step 3 Fix 3 Large bearing plates to underside of 3 base plate lockers
(large wheel facing downwards towards base)
- Step 4 Fix 1 small Bearing Plate (no wings) to underside of 1 Locker Seeds
- Step 5 Take 3 locker seeds with the large bearing plates and attach them to the centre hub of the rotating base unit using M6 nut and bolt set
- Step 6 Position the remaining Locker seeds to fill the correct gaps
(see main drawing) using the front holes in the side of the seeds bolt together to complete the pod Circle
- Step 7 Fix standard infill Centre black Cap using tape provided

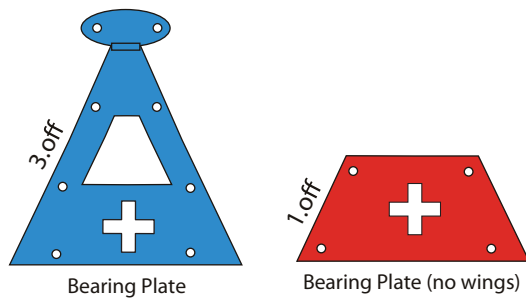

PLAN VIEW 7 Seed Unit

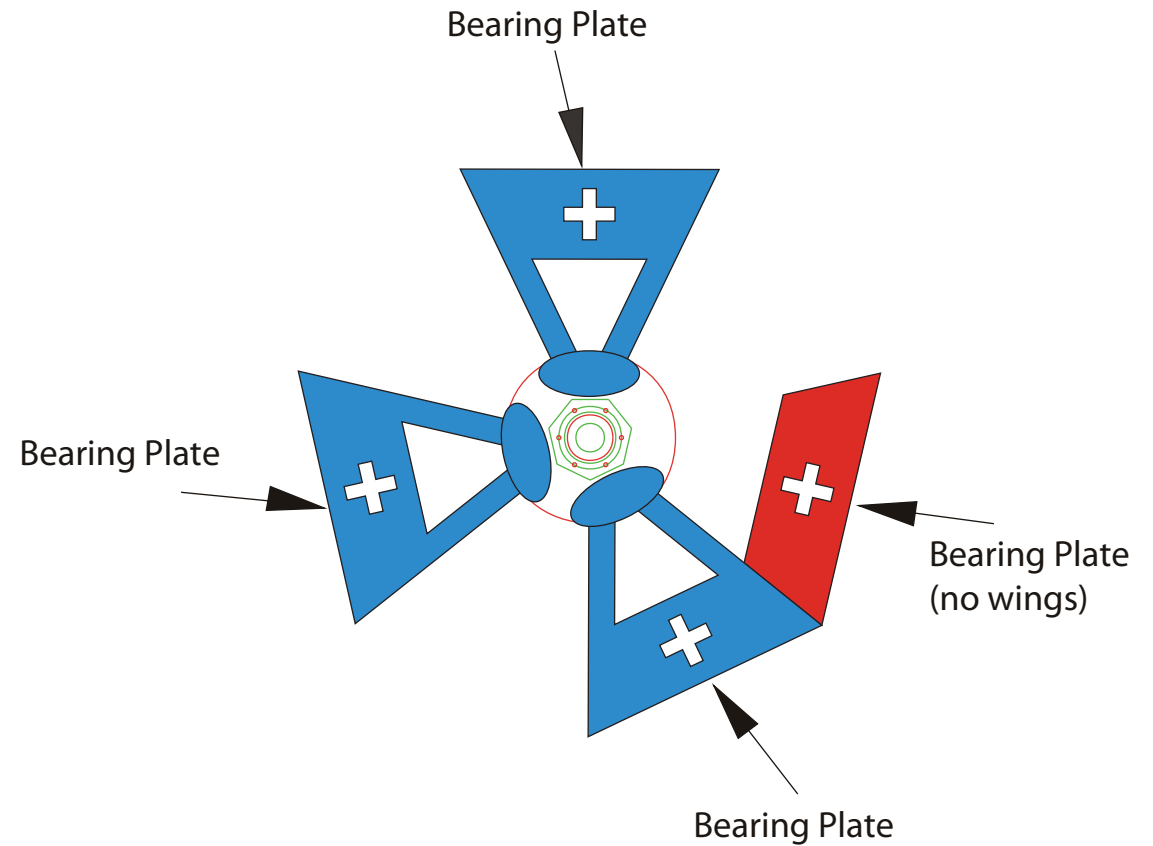

Plan View of turntable showing position of Seed Plates